

# LIGHTDISC


design Alberto Meda / Paolo Rizzatto, 2002



Type: Wall/ Ceiling  
Lamps: 22W FC9 T5 2GX13 (120/227v~50/60Hz)  
Product use: Indoor, Outdoor  
Materials: Unbreakable, watertight polycarbonate  
Colors: Structure in metal, transparent  
Diffuser in opaline, transparent  
Description: Sealed, ultra-light, slender, this fitting follows the circular shape of fluorescent lamps. Its minimal depth allows it to be fitted to ceilings or walls while appearing built-in. Metallic and transparent finishes allow different modulations of light.  
Certifications: **ADA IP65** (suitable for wet location)  
Awards: Compasso d'Oro ADI Milano 2004, selection  
Reference code: D41/32.22 1D41PI220500 trasparente  
1D41PI220519 metallized  
D41B/32.22 1D41PI22B500 trasparente  
1D41PI22B519 metallized




D41/32.22 electronic ballast  
D41B/32.22 electronic ballast

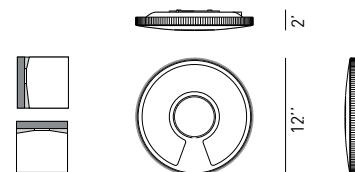

weight 2.16 lb


D41/32.22 - Light intensity distribution

transparent  
— C0/C180  
..... C90/C270




D41/32.22 - Light intensity distribution

metal  
— C0/C180  
..... C90/C270



D41B/32.22 - Light intensity distribution

transparent  
— C0/C180  
..... C90/C270



D41B/32.22 - Light intensity distribution

metal  
— C0/C180  
..... C90/C270

